


# BlueMAC High Level Network Architecture (Client Private Server option with GSM Private APN)

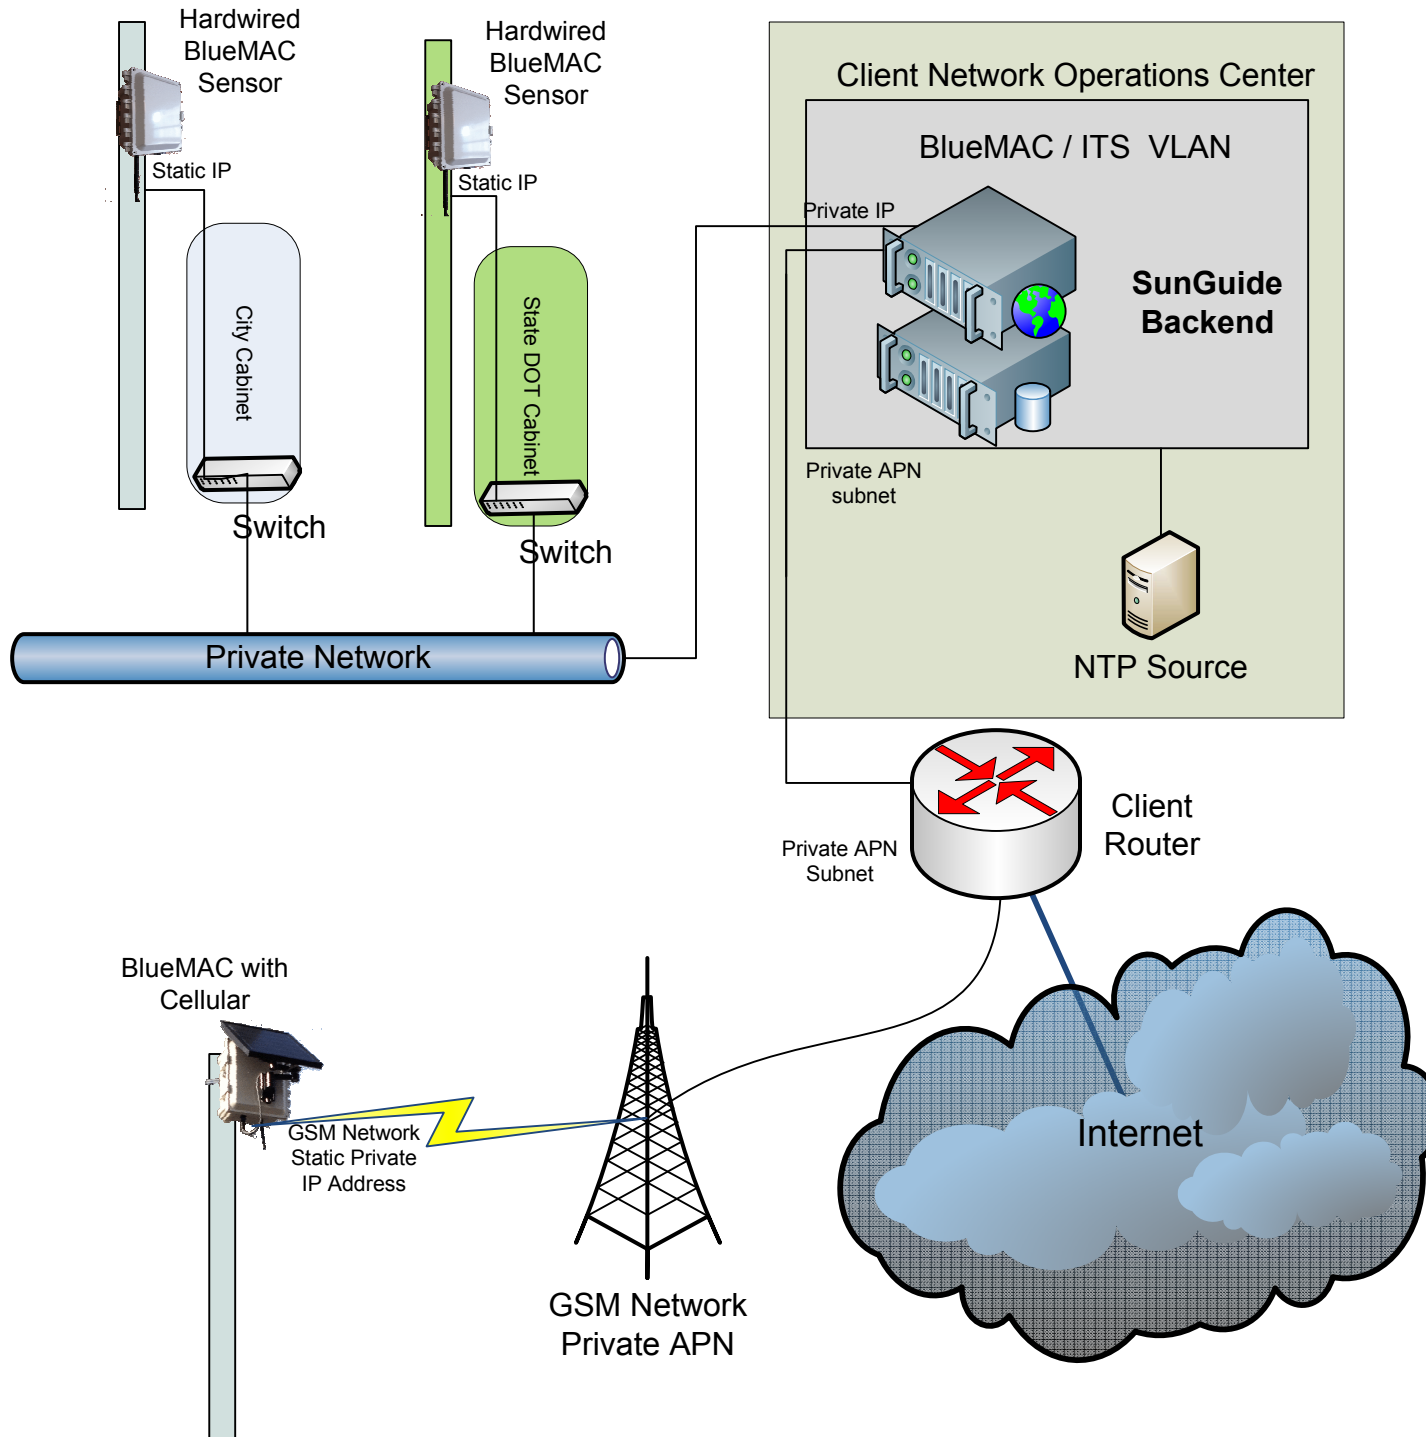

## Notes:

1. Wireless devices will have 2 way communication via private, static IP addresses to SunGuide.
2. Wireless devices act as if they are on the same LAN with an internal IP address. Static IP addresses are linked to each SIM card.
3. Typically the provider will connect the client's network to the Private APN via a leased line from the Telco or a VPN tunnel through Internet, TDB
4. Private APN terms to TDB with cellular provider.